


Unique characteristics

Backflow protection unit type

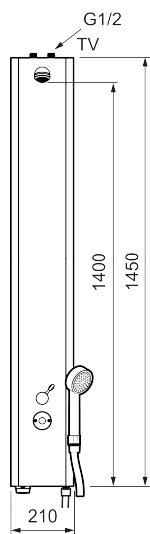

FM Mattsson tronic shower panel WMS, HCP-model , for premixed water, battery operation

Article number: 95000740

Description: Stainless look, battery operation, included battery

- Accessible shower panel with lower edge approx. 800 mm above floor level for increased accessibility
- Shower panel with possibilities of wireless connection (subscription is required)
- With hand shower and hose
- With mixing valve
- Battery operation, can be converted to mains operation
- Connection up G1/2". Ball valve are ordered seperately
- With solenoid valve
- Programmable start button. Rinsing time from 10–60 seconds, (30 seconds is the factory preset)
- Flush Timeout - safety shut-off to prevent flooding, maximum of 5 minutes
- Jet angle adjustable +/- 5°
- Flow limiter 9 l/min
- Can be turned off by solenoid valve (eg for cleaning)
- Low power consumption - Long life
- Equipped with system for thermal disinfection against legionella
- IP class sensor, IP67
- Approved non-return valves, EN-Standard EN171

Installation:

- Easy to change battery under the service cover without turning off the water supply
- Mains operation requires installation of the AC adapter FMM S600132 power supply FMM S600129 alternatively transformer FMM S600128, plus extension cable FMM S600127

Tronic WMS:

- Note! Gateway and subscription or dongle are required for the WMS function

- The following options are available with wireless connection to our Tronic WMS system:
- Programmable rinsing time from 10–60 seconds, (30 seconds is the factory preset)
- Selection of activation type:
 - Saving mode, set time, always flush at the same time, factory preset mode
 - Normal, rinsing time is extended if you press again before it stops
 - Switching mode, set time, reactivation interrupts flushing
- Adjustable hygiene flushing, interval and rinsing time (in order to prevent stagnant water)
- Logging of all flushings with point of time, water consumption and temperature for individual mixer or group of mixers (minimum, maximum and average values)
- Battery monitoring
- Built-in temperature measurements of mixed water temperature
- Programmable temperature stop, the mixer will turn off directly at set maximum temperature
- Initiate hot water rinsing

| NO. | FMM NO. | RSK | DESCRIPTION |
|-----|-----------|---------|---------------------------------------|
| 12 | S600135 | 8483191 | Battery |
| 13 | S600132 | 8438826 | AC adapter |
| 14 | 16202000 | 8221794 | Solenoid valve |
| 15 | 39090000 | 8221812 | Hose kit, connection behind |
| 16 | S600025 | 8221869 | Shower head, complete |
| 17 | 409364.AE | 8346506 | Scalding protection ring, (max 42 °C) |