




## Unique characteristics

Backflow protection unit type

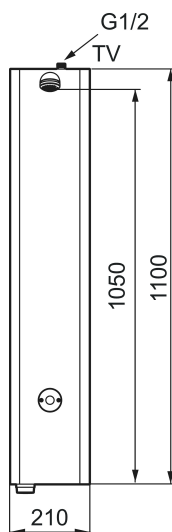

## FM Mattsson tronic shower panel WMS, for premixed water, mains operation

**Article number:** 95000102 **RSK:** 8255853

**Description:** Matte white, mains operated (excl. transformer), included 5 m extension cable

- Shower panel with possibilities of wireless connection (subscription is required)
- With mixing valve
- Mains operation (excl. transformer). Incl. AC adapter and 5 m extension cable
- Connection up G1/2". Ball valve are ordered separately
- With solenoid valve
- Programmable start button. Rinsing time from 10–60 seconds, (30 seconds is the factory preset)
- Flush Timeout - safety shut-off to prevent flooding, maximum of 5 minutes
- Jet angle adjustable +/- 5°
- Flow limiter 9 l/min
- Can be turned off by solenoid valve (eg for cleaning)
- Stainless steel design with powder-coated casing. Standard colour white NCS S0500-N, Gloss 30, other colours and gloss levels available on request.
- Low power consumption - Long life
- Equipped with system for thermal disinfection against legionella
- IP class sensor, IP67

### Installation:

- Easy to change battery under the service cover without turning off the water supply
- Mains operation requires installation of the power supply FMM S600129 alternatively transformer FMM S600128

### Tronic WMS:

- Note! Gateway and subscription or dongle are required for the WMS function


- The following options are available with wireless connection to our Tronic WMS system:
- Programmable rinsing time from 10–60 seconds, (30 seconds is the factory preset)
- Selection of activation type:
  - Saving mode, set time, always flush at the same time, factory preset mode
  - Normal, rinsing time is extended if you press again before it stops
  - Switching mode, set time, reactivation interrupts flushing
- Adjustable hygiene flushing, interval and rinsing time (in order to prevent stagnant water)
- Logging of all flushings with point of time, water consumption and temperature for individual mixer or group of mixers (minimum, maximum and average values)
- Built-in temperature measurements of mixed water temperature
- Programmable temperature stop, the mixer will turn off directly at set maximum temperature
- Initiate hot water rinsing

## PRODUCT DESCRIPTION

### FM Mattsson tronic shower panel WMS, for premixed water, mains operation

Article number: 95000102

RSK: 8255853

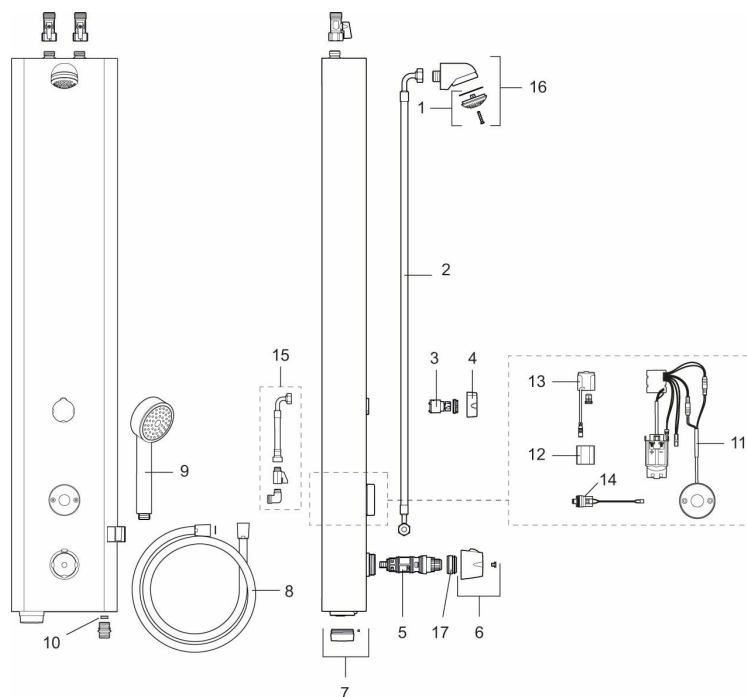

## Sparepartlist

| NO. | FMM NO.  | RSK     | DESCRIPTION                                          |
|-----|----------|---------|------------------------------------------------------|
| 1   | 29182000 | 8221808 | Shower strainer                                      |
| 2   | 39090700 | 8221813 | Connection hose, 0,7 m                               |
| 3   | S600321  | 8239708 | Cartridge for diverter                               |
| 4   | 16221700 | 8221796 | Handle for diverter                                  |
| 5   | 38607000 | 8591963 | Thermostatic cartridge, complete, incl. service tool |
| 6   | S600222  | 8239545 | Temperature handle, complete                         |
| 7   | 16222600 | 8438816 | Cover plug for battery, black                        |
| 8   | S600310  | 8239707 | Shower hose in metal, 1750 mm                        |
| 9   | S600330  | 8233133 | Hand shower, chrome                                  |
| 10  | 29900600 | 8224321 | Flow limiter, constant flow 6 l/min at 200–600 kPa   |
| 10  | 29900900 | 8221809 | Flow limiter, constant flow 9 l/min at 200–600 kPa   |
| 10  | 29901200 | 8224320 | Flow limiter, constant flow 12 l/min at 200–600 kPa  |
| 11  | 16216500 | 8438815 | Electronic unit                                      |
| 12  | S600135  | 8483191 | Battery                                              |

| NO. | FMM NO.   | RSK     | DESCRIPTION                           |
|-----|-----------|---------|---------------------------------------|
| 13  | S600132   | 8438826 | AC adapter                            |
| 14  | 16202000  | 8221794 | Solenoid valve                        |
| 15  | 39090000  | 8221812 | Hose kit, connection behind           |
| 16  | S600025   | 8221869 | Shower head, complete                 |
| 17  | 409364.AE | 8346506 | Scalding protection ring, (max 42 °C) |