





Unique characteristics



Backflow protection unit type 

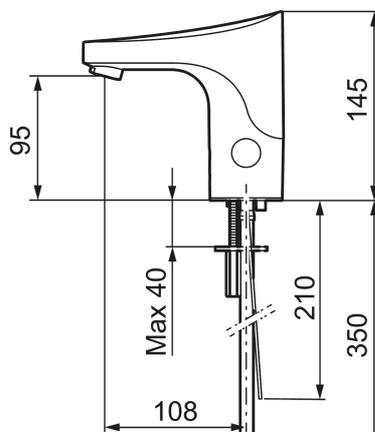

9000E tronic WMS basin mixer, for premixed water, mains operation

Article number: 16406100 **RSK:** 8430590


Description: Chrome, mains operation, without transformer

- WMS-mixers with possibilities of wireless connection
- For premixed water
- Soft closing solenoid valve
- Safe against vandalism, complete in metal
- Eco (energy and water saving constant flow aerator, 5 l/min at 200–600 kPa)
- Flush Timeout - safety shut-off to prevent flooding
- Rinse time
- Time limited shut-off (eg for cleaning)
- Low power consumption - Long life
- Equipped with function for thermal disinfection against legionella
- Mains operation (excl. transformer)
- IP class sensor, IP67
- Approved non-return valves, EN-Standard EN1717
- Environmental friendly material, Lead free, Nickel Free

Installation:

- Automatic sensor calibration
- Mains operation requires power supply art.no. S600129, alternatively transformer art.no. S600128
- Soft PEX[®] hose with integrated non return valves and filters (stainless steel braided)
- Hole diameter $\varnothing 33,5-37$ mm

Tronic WMS:




- With wireless connection to the Tronic WMS system (gateway and subscription required) alternatives via Dongel (1616-1000) the following opportunities are obtained:
 - Programmable rinsing time from 10–60 seconds
 - Built-in temperature measurements (measures output water temperature)
 - Programmable temperature stop, the mixer will turn off directly at set maximum temperature
 - Flush time control, prevents overflow, maximum flush time 5 min.
 - Adjustable hygiene flushing, interval and flush time (to prevent water becoming stagnant)
 - Logging of all flushings with point of time, water consumption and temperature. - Only with WMS
 - Alarm via SMS or email – Only with WMS

PRODUCT DESCRIPTION

9000E tronic WMS basin mixer,
for premixed water, mains
operation

Article number: 16406100

RSK: 8430590

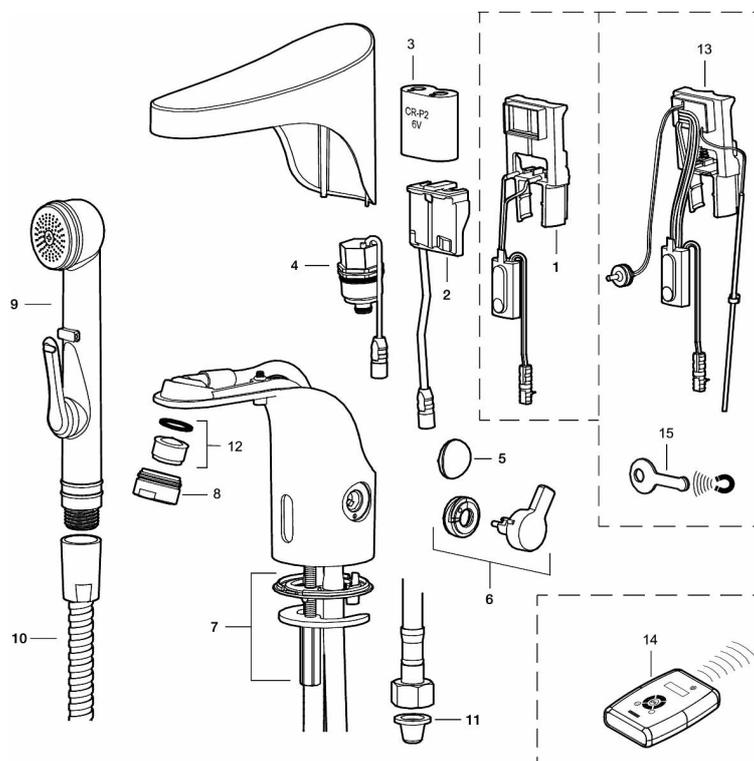

Sparepartlist

| NO. | FMM NO. | RSK | DESCRIPTION |
|-----|----------|---------|--|
| 1 | S600278 | 8398041 | Electronic unit, Stand. |
| 1 | S600329 | 8398042 | Electronic unit, centrally controlled |
| 2 | S600131 | 8483190 | AC adapter |
| 3 | S600135 | 8483191 | Battery |
| 4 | S600277 | 8398040 | Solenoid valve |
| 5 | 16222000 | 8553505 | Cover plug |
| 6 | 16221000 | 8553504 | Lever |
| 7 | 39141600 | 8553512 | Fastening kit |
| 8 | 29142400 | 8281526 | Housing M24 ext., 13 mm |
| 9 | 34582000 | 8183841 | Self-closing hand shower |
| 10 | S600207 | 8236647 | Shower hose, L=1,5 m, chrome |
| 11 | 38800009 | 8295340 | Filter kit Soft PEX 3/8", 2 pcs |
| 12 | 29100500 | 8281532 | Aerator insert, 5 l/min at 200–600 kPa |

| NO. | FMM NO. | RSK | DESCRIPTION |
|------------|----------------|------------|--|
| 12 | S600072 | 8281671 | Aerator insert, 3 l/min at 200–600 kPa |
| 12 | S600181 | 8280020 | Aerator insert, 1,4 l/min at 200–600 kPa |
| 13 | 16216100 | 8438811 | Electronic unit, for WMS mixer |
| 14 | 16250000 | 8553508 | Remote control |
| 15 | S600150 | | Service magnet |